



Features

- Selectable sensor Input (T/C & RTD)
- Control Action : PID Control / ON-OFF
- Input Signal Conditioning (Digital Filter & Zero Offset)
- Programmable Lower and Higher Setpoint Limit
- Program Lock function
- Selectable Control Output (Relay / SSR Drive)
- Selectable Alarm / Soak Timer Output (Except 48x48 size)
- Alarm Acknowledge function / Alarm Inhibit function
- Alarm Inhibit function
- Programmable soak timer
- Four different start modes for soak timer
- Battery Backup for Soak Timer
- Timer Hold Strategy
- Settable soak time delay
- Overshoot Control Protection
- Single Step Ramp Soak
- Time Delay for Compressor
- Universal supply voltage (90 to 270 VAC)
- 24 VDC Available on Request

Display Specification

Digits	: 4 Digits Dual Row 7 Segment LED Display				
LED Indication	: OP1 - Control Output Status OP2 - Alarm Status SOAK - Soak Timer TUNE - Tuning Status				
Model	AI-7482D	AI-7782D	AI-7982D	AI-7682D	AI-7882D
Height					
PV (White)	0.36"	0.56"	0.80"	0.36"	0.36"
SV (Green)	0.24"	0.39"	0.56"	0.36"	0.36"

Input Specification

Sensor Input	: Thermocouple - J, K, R, S, N, T, B RTD - Pt-100
Resolution	: T/C - 1°C & Pt-100 - 1°C / 0.1°C
Accuracy	: 0.3% FS
Temperature Unit	: °C
Sampling Rate	: 250msec
Digital Input	:

Output Specification

Control Output	: Relay / SSR Drive (User Selectable)
Output 2	: Relay / SSR Drive (User Selectable, Except 48x48)
Relay	: 5A @ 250VAC / 30VDC
SSR Drive	: 12 VDC @ 30mA

Auxiliary Supply Specification

Supply Voltage	: 90 - 270 VAC (24 VDC Available on Request)
----------------	---

Functional Specification

Control Action	: PID Control / ON-OFF
Control Logic	: Heat / Cool
Proportional Band	: 0.5 to 99.9%
Integral Time	: 0 to 3600 sec
Derivative Time	: 0 to 300 sec
Cycle Time	: 1.0 to 100.0 sec
Overshoot Control Point	: 0 to 100%
Output Power Limit	: 0 to 100%
Hysteresis	: J, K, R, S, N, T, B, RTD - 1 to 100°C RTD.1 - 0.1 to 100.0°C
Delay	: 0 to 500 sec
Output2 Function	: None / Auxiliary / Alarm / Soak Timer / Alarm Soak
Alarm Modes	: Low / High / Deviation / Band
Soak Timer	: Heater Off / Alarm / Both

Environmental Specification

Temperature	: Operating - 0 to 50°C
Storage	: -20° to 75°C
Humidity	: 95% RH (Non-condensing)


General Description

Model	AI-7482D	AI-7782D	AI-7982D	AI-7682D	AI-7882D
Weight (Gms)	150	250	280	220	220

Certification


None

Mechanical Dimensions

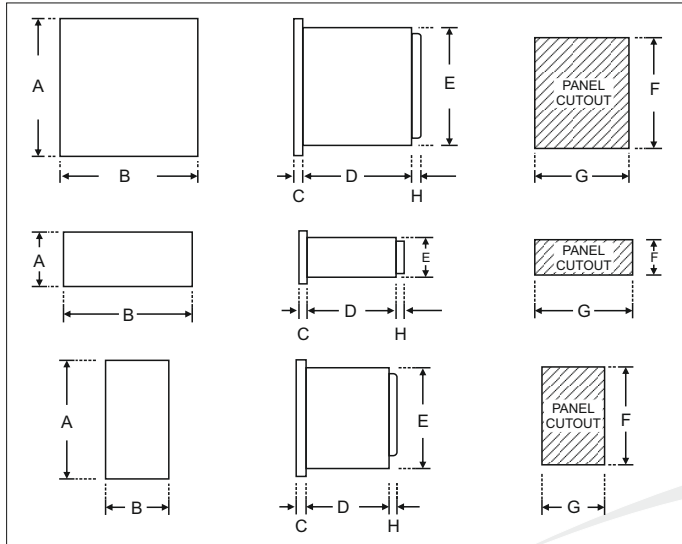

Model	Dim A	Dim B	Dim C	Dim D	Dim E	Dim F	Dim G	Dim H
AI-7482	48	48	8	78	43	44	44	9
AI-7782	72	72	10	65	66	68	68	9
AI-7982	96	96	10	53	89	92	92	9
AI-7682	96	48	10	53	89	92	44	9
AI-7882	48	96	10	53	43	44	92	9

Terminal Diagram

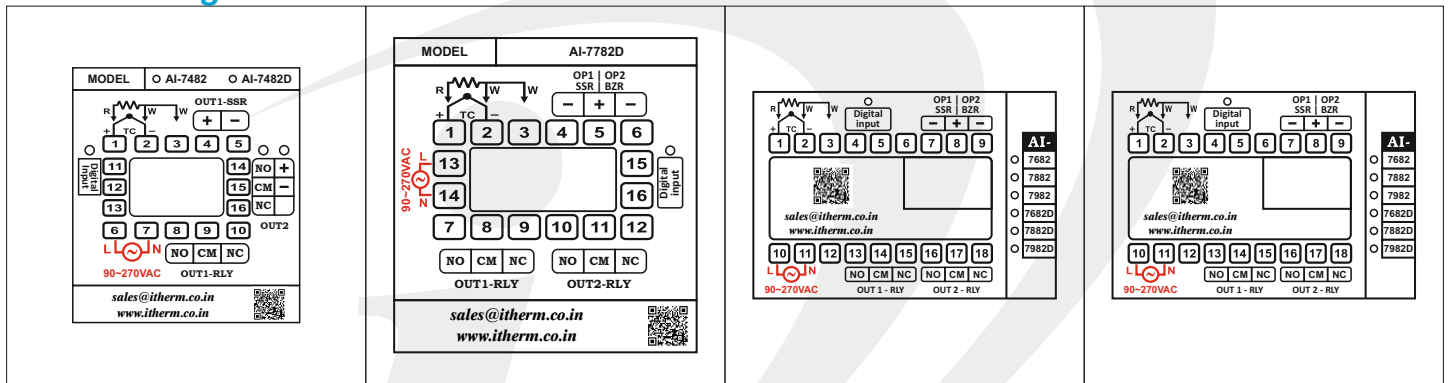

Order Code : AI-7XXXD Series

Control Action	Size	No. Of Digits	No. Of Outputs	O/P1 Type	O/P2 Type
7 (PID / ON-OFF)	4 (48X48X78)	4 Digits	One	R (Relay)	R (Relay)
	6 (96X48X53)	8 Digits	Two	S (SSR Drive)	S (SSR Drive)
	7 (72X72X65)				N (None)
	8 (48X96X53)				
	9 (96X96X53)				

Example : AI-7782D-R-R

Control Action	Size	No. Of Digits	No. Of Outputs	O/P1 Type	O/P2 Type
7	7	8	2	R	R
PID / ON-OFF	7 (72X72X65)	8 Digits	Two	R (Relay)	R (Relay)

Input Sensor Range

Sensor Input	Range	Resolution	Accuracy
Fe-k(J) T/C	0 ~ 760 °C	1 °C	± 1 °C
Cr-AL(K) T/C	-99 ~ 1300 °C	1 °C	± 1 °C
(R) T/C	0 ~ 1700 °C	1 °C	± 1 °C
(S) T/C	0 ~ 1700 °C	1 °C	± 1 °C
TC - N	-99 ~ 1300°C	1 °C	± 1 °C
TC - T	-99 ~ 400°C	1 °C	± 1 °C
TC - B	0 ~ 1800°C	1 °C	± 1 °C
Pt-100(RTD)	-100 ~ 450 °C	1 °C	± 1 °C
Pt-100(RTD.1)	-99.9 ~ 450.0 °C	0.1 °C	± 0.3 °C